

Heterojunction Intrinsic Thin-layer HJT Module

RSM120-6-335HDG-355HDG

120 CELL HJT MODULE

335-355Wp POWER OUTPUT RANGE

1500VDC MAXIMUM SYSTEM VOLTAGE

20.8% MAXIMUM EFFICIENCY



About Risen Energy

Risen Energy is a leading, global tier 1 manufacturer of high-performance solar photovoltaic products and provider of total business solutions for residential, commercial and utility-scale power generation. The company, founded in 1986, and publicly listed in 2010, compels value generation for its chosen global customers. Techno-commercial innovation, underpinned by consummate quality and support, encircle Risen Energy's total Solar PV business solutions which are among the most powerful and cost-effective in the industry. With local market presence and strong financial bankability status, we are committed, and able, to building strategic, mutually beneficial collaborations with our partners, as together we capitalise on the rising value of green energy.

KEY SALIENT FEATURES



Global, Tier 1 bankable brand, with independently certified state-of-the-art automated manufacturing



Industry leading lowest thermal co-efficient of power



Industry leading 12 years product warranty



Excellent low irradiance performance



Excellent PID resistance



Positive tight power tolerance



Dual stage 100% EL Inspection warranting defect-free product



Module Imp binning radically reduces string mismatch losses



Warranted reliability and stringent quality assurances well beyond certified requirements



Certified to withstand severe environmental conditions

- ◆ Anti-reflective & anti-soiling surface minimise power loss from dirt and dust
- ◆ Severe salt mist, ammonia & blown sand resistance, for seaside, farm and desert environments
- ◆ Excellent mechanical load 2400Pa & snow load 5400Pa resistance



Qualified: IEC61215
Qualified: IEC61730



RISEN ENERGY CO., LTD.

Tashan Industry Zone, Meilin,
Ninghai 315609, Ningbo | PRC

Tel: +86-574-59953239


Fax: +86-574-59953599

E-mail: marketing@risenenergy.com

Website: www.risenenergy.com


LINEAR PERFORMANCE WARRANTY

12 year Product Warranty / 30 year Linear Power Warranty

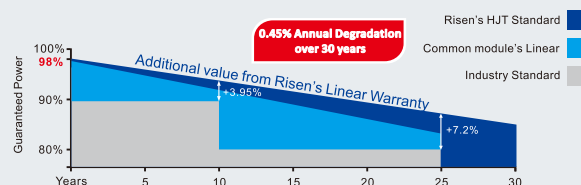

★ Please check the valid version of Limited Product Warranty which is officially released by Risen Energy Co., Ltd

Dimensions of PV Module Unit: mm

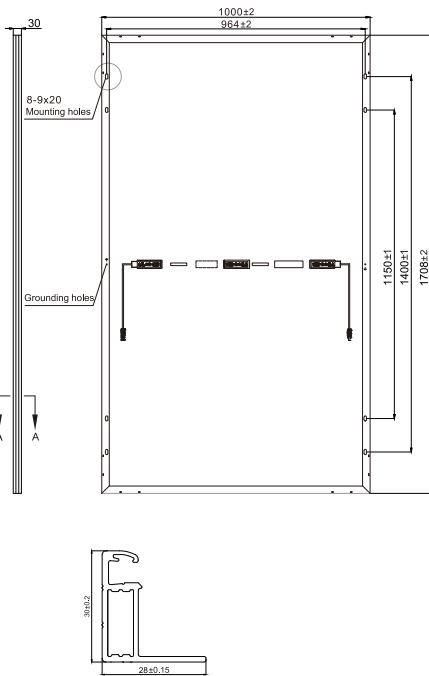

ELECTRICAL DATA (STC)

Model Number	RSM120-6-335HDG	RSM120-6-340HDG	RSM120-6-345HDG	RSM120-6-350HDG	RSM120-6-355HDG
Rated Power in Watts-Pmax(Wp)	335	340	345	350	355
Open Circuit Voltage-Voc(V)	44.65	44.95	45.25	45.55	45.85
Short Circuit Current-Isc(A)	9.60	9.65	9.70	9.75	9.80
Maximum Power Voltage-Vmpp(V)	37.40	37.70	38.00	38.30	38.60
Maximum Power Current-Impp(A)	8.97	9.03	9.09	9.15	9.21
Module Efficiency (%) *	19.6	19.9	20.2	20.5	20.8

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

* Module Efficiency (%): Round-off to the nearest number

ELECTRICAL DATA (NMOT)

Model Number	RSM120-6-335HDG	RSM120-6-340HDG	RSM120-6-345HDG	RSM120-6-350HDG	RSM120-6-355HDG
Maximum Power-Pmax (Wp)	250.8	254.5	258.2	262.0	265.7
Open Circuit Voltage-Voc (V)	41.08	41.35	41.63	41.91	42.18
Short Circuit Current-Isc (A)	7.87	7.91	7.95	8.00	8.04
Maximum Power Voltage-Vmpp (V)	34.26	34.53	34.81	35.08	35.36
Maximum Power Current-Impp (A)	7.32	7.37	7.42	7.47	7.52

NMOT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	HJT cell, 9BB
Cell configuration	120 cells (6×10+6×10)
Module dimensions	1708×1000×30mm
Weight	20kg
Superstrate	High Transmission, Low Iron, Tempered ARC Glass
Substrate	Tempered Glass
Frame	Anodized Aluminium Alloy type 6063T5, Silver Color
J-Box	Potted, IP68, 1500VDC, 3 Schottky bypass diodes
Cables	4.0mm ² (12AWG), Positive(+)270mm, Negative(-)270mm
Connector	Risen Twinsel PV-SY02, IP68

TEMPERATURE & MAXIMUM RATINGS



Nominal Module Operating Temperature (NMOT)	43°C±2°C
Temperature Coefficient of Voc	-0.22%/°C
Temperature Coefficient of Isc	0.047%/°C
Temperature Coefficient of Pmax	-0.24%/°C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	20A
Limiting Reverse Current	20A

PACKAGING CONFIGURATION

	40ft	20ft
Number of modules per container	910	420
Number of modules per pallet	35	35
Number of pallets per container	26	12
Packaging box dimensions (LxWxH) in mm	1780×1130×1135	1780×1130×1135
Box gross weight[kg]	750	750

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

©2020 Risen Energy. All rights reserved. Specifications included in this datasheet are subject to change without notice.

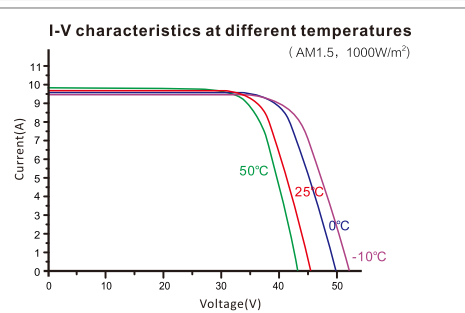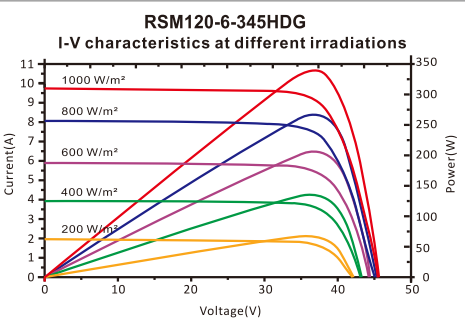

Our Partners: