




# First Solar Series 6™

NEXT GENERATION THIN FILM SOLAR TECHNOLOGY

MODULE DATASHEET

## HIGH-POWER PV MODULES

First Solar Series 6™ photovoltaic (PV) module sets a new industry benchmark for reliable energy production, optimized design and environmental performance. Series 6 modules are optimized for every stage of your application, significantly reducing balance of system, shipping, and operating costs.

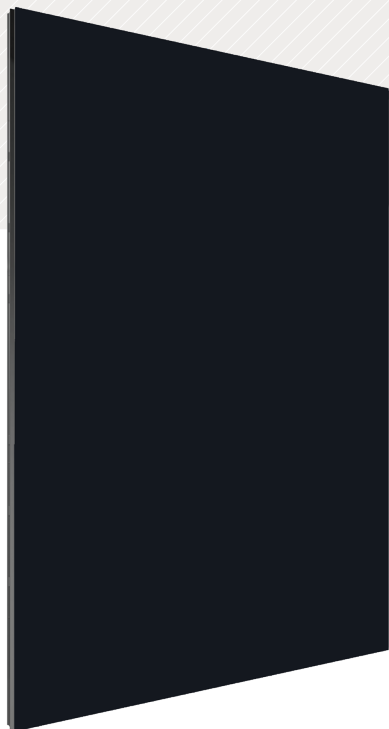


**420-450 Watts**  
**17%+ Efficiency**

## INDUSTRY-LEADING MODULE WARRANTY<sup>1</sup>

**98%** WARRANTY START POINT

**0.5%** WARRANTED ANNUAL DEGRADATION RATE

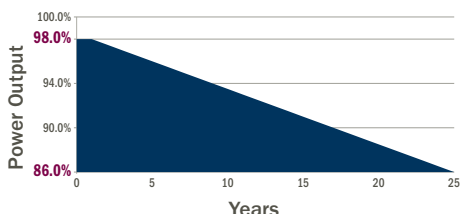

- 25-Year Linear Performance Warranty
- 10-Year Limited Product Warranty
- Industry's First and Only Hidden Cell Cracking Warranty



## MORE ENERGY PER MODULE

- More watts per connection and per lift (up to 450 watts) than 72-cell silicon modules
- With superior temperature coefficient, spectral response and shading behavior, Series 6 modules generate up to 8% more energy per watt than conventional crystalline silicon solar modules
- Anti-reflective coated glass enhances energy production



## INNOVATIVE MODULE DESIGN

- Under-mount frame provides the cleaning and snow-shedding benefits of a frameless module while protecting edges against breakage
- Innovative SpeedSlots™ combine the robustness of bottom mounting with the speed of top clamping while utilizing fewer fasteners to achieve fastest installation times and lowest mounting hardware costs
- Dual junction box optimizes module-to-module connections and eliminates need for wire management



## BEST IN-CLASS RELIABILITY & DURABILITY

- Manufactured under one roof with 100% traceable QA/QC
- Independently tested and certified for reliable performance that exceeds IEC standards in high temperature, high humidity, extreme desert and coastal applications
- Inherently immune to and warranted against hidden cell cracking power loss
- Durable glass/glass construction with market-leading hail impact certification



## BEST ENVIRONMENTAL PROFILE

- Fastest energy payback time in the industry
- Produced using up to 6x less carbon and up to 24x less water than c-Si
- Global PV collection and recycling services available through First Solar or customer-selected third-party

# FIRST SOLAR SERIES 6™

## MODEL TYPES AND RATINGS AT STANDARD TEST CONDITIONS (1000W/m<sup>2</sup>, AM 1.5, 25°C)<sup>2</sup>

NOMINAL VALUES		FS-6420 FS-6420A	FS-6425 FS-6425A	FS-6430 FS-6430A	FS-6435 FS-6435A	FS-6440 FS-6440A	FS-6445 FS-6445A	FS-6450 FS-6450A
Nominal Power <sup>3</sup> (-0/+5%)	P <sub>MAX</sub> (W)	420	425	430	435	440	445	450
Efficiency (%)	%	17.0	17.2	17.4	17.6	17.8	18.0	18.2
Voltage at P <sub>MAX</sub>	V <sub>MAX</sub> (V)	180.4	181.5	182.6	183.6	184.7	185.7	186.8
Current at P <sub>MAX</sub>	I <sub>MAX</sub> (A)	2.33	2.34	2.36	2.37	2.38	2.40	2.41
Open Circuit Voltage	V <sub>OC</sub> (V)	218.5	218.9	219.2	219.6	220.0	220.4	221.1
Short Circuit Current	I <sub>SC</sub> (A)	2.54	2.54	2.54	2.55	2.55	2.56	2.57
Maximum System Voltage	V <sub>SYS</sub> (V)	1500 <sup>5</sup>						
Limiting Reverse Current	I <sub>R</sub> (A)	5.0						
Maximum Series Fuse	I <sub>CF</sub> (A)	5.0						

## RATINGS AT NOMINAL OPERATING CELL TEMPERATURE OF 45°C (800W/m<sup>2</sup>, 20°C air temperature, AM 1.5, 1m/s wind speed)<sup>2</sup>

Nominal Power	P <sub>MAX</sub> (W)	317.2	320.9	324.7	328.5	332.4	336.0	339.9
Voltage at P <sub>MAX</sub>	V <sub>MAX</sub> (V)	168.7	169.8	170.9	172.0	173.1	174.1	175.2
Current at P <sub>MAX</sub>	I <sub>MAX</sub> (A)	1.88	1.89	1.90	1.91	1.92	1.93	1.94
Open Circuit Voltage	V <sub>OC</sub> (V)	206.3	206.6	207.0	207.3	207.7	208.0	208.8
Short Circuit Current	I <sub>SC</sub> (A)	2.04	2.05	2.05	2.06	2.06	2.06	2.07

## TEMPERATURE CHARACTERISTICS

Module Operating Temperature Range	(°C)	-40 to +85
Temperature Coefficient of P <sub>MAX</sub>	T <sub>K</sub> (P <sub>MAX</sub> )	-0.32%/°C [Temperature Range: 25°C to 75°C]
Temperature Coefficient of V <sub>OC</sub>	T <sub>K</sub> (V <sub>OC</sub> )	-0.28%/°C
Temperature Coefficient of I <sub>SC</sub>	T <sub>K</sub> (I <sub>SC</sub> )	+0.04%/°C

## MECHANICAL DESCRIPTION

Length	2009mm
Width	1232mm
Thickness	49mm
Area	2.47m <sup>2</sup>
Module Weight	34.5kg
Leadwire <sup>6</sup>	2.5mm <sup>2</sup> , 720mm (+) & Bulkhead (-)
Connectors	MC4-EVO 2 or TE Connectivity PV4-S
Bypass Diode	N/A
Cell Type	Thin film CdTe semiconductor, up to 264 cells
Frame Material	Anodized Aluminum
Front Glass	Heat strengthened
Back Glass	Heat strengthened
Encapsulation	Laminate material with edge seal
Frame to Glass Adhesive	Silicone
Load Rating <sup>7</sup>	2400Pa

## PACKAGING INFORMATION

Modules Per Pallet	27	Pallet Dimensions (L x W x H)	2200 x 1300 x 1164mm (86 x 51 x 45.8in)
Pallets per 40' Container	18	Pallet Weight	1032kg

### Disclaimer

The information included in this Module Datasheet is subject to change without notice and is provided for informational purposes only. No contractual rights are established or should be inferred because of user's reliance on the information contained in this Module Datasheet. Please refer to the appropriate Module User Guide and Module Product Specification document for more detailed technical information regarding module performance, installation and use.

The First Solar logo, First Solar™, and all products denoted with ® are registered trademarks, and those denoted with a ™ are trademarks of First Solar, Inc.

## CERTIFICATIONS AND TESTS<sup>4</sup>

### IEC

61215:2016 & 61730-1:2016<sup>5</sup>, CE  
61701 Salt Mist Corrosion  
60068-2-68 Dust and Sand Resistance

### UL

UL 1703 1500V Listed<sup>5</sup>  
UL 61730 1500V Listed

## REGIONAL CERTIFICATIONS

InMetro SII  
BIS FSEC  
MyHijau

## EXTENDED DURABILITY TESTS


ANSI/CAN/CSA-C450-18  
Long-Term Sequential  
Thresher Test  
PID Resistant

## QUALITY & EHS

ISO 9001:2015  
ISO 14001:2015  
ISO 45001:2018



## MECHANICAL DRAWING

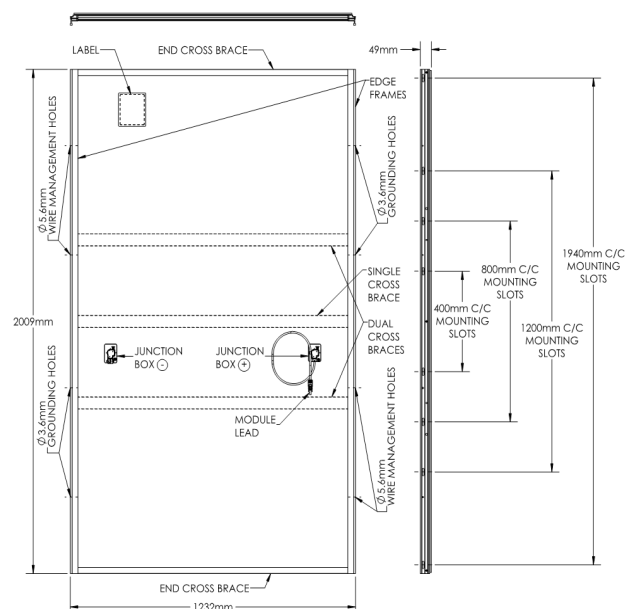

Install in portrait only

1 Limited power output and product warranties subject to warranty terms and conditions

2 All ratings ±10%, unless specified otherwise. Specifications are subject to change

3 Measurement uncertainty applies

4 Testing Certifications/Listings pending

5 IEC 61730-1: 2016 Class II | ULC (Canada) 1703 1000V listed

6 Leadwire length from junction box exit to connector mating surface

7 1000Pa tentative design load rating for 1940mm mounting slots. Higher loads may be acceptable, subject to testing