


# ZXP6-72 Series

Znshinesolar **5BB** Polycrystalline PV Module



72



Mono **Poly** Solutions

**315W | 320W | 325W | 330W | 335W | 340W**

Made with selected materials and components to grant quality, duration, efficiency and through outputs, the ZXP6-72 polycrystalline modules by ZNSHINE SOLAR represent a highly flexible solution for diverse installation types, from industrial rooftop plants to small home PV systems or large ground surfaces. This allows you to produce clean energy whilst reducing your energy bill.

ZNSHINE SOLAR' S ZXP6-72 polycrystalline solar modules are tested and approved by international acknowledged laboratories, so that we can offer our customers a reliable and price-quality optimized product. The linear warranty on product outputs further ensures increased security and return on investments over time.

- 12 years product warranty for general application**
- 15 years product warranty for Rooftop PV system**
- 25 years output warranty/0.7% linear degradation p.a.**

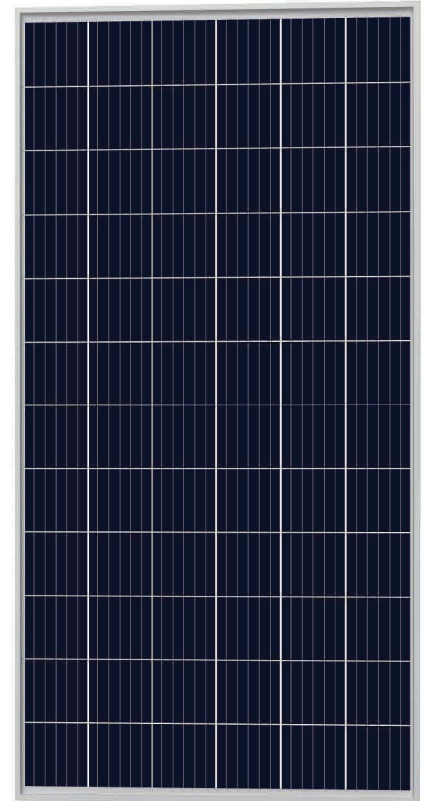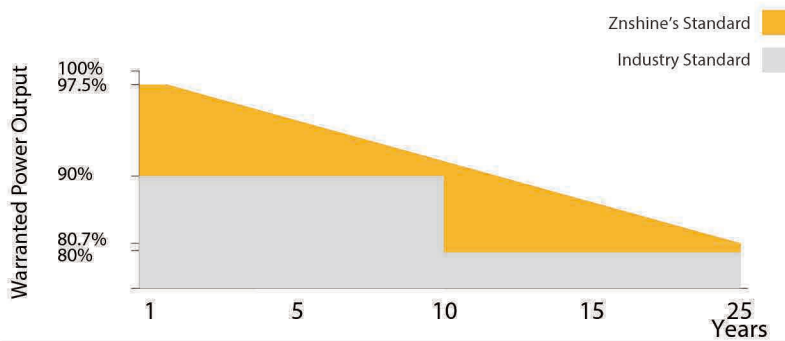

### 5 Busbar Solar Cell

No power loss thanks to improved temperature co-efficient caused by 5 busbar solar cell



### Easy to install

The module is very light in weight so the installation is easier and transport costs are lower



### Anti PID (Optional)

Limited power degradation of ZXP6-72 module caused by PID effect is guaranteed under strict testing condition for mass production



### Linear Warranty

25-year linear warranty on outputs



ZNShine PV-Tech Co., LTD, founded in 1988, is a world-leading high-performance PV module manufacturer, PV power station developer, EPC and power station operator. With its state-of-the-art production lines, the company boasts module output of 3.2GW. Bloomberg has listed ZNShine as a global Tier 1 PV manufacturer and Top 10 reliable PV supplier.

[www.znshinesolar.com](http://www.znshinesolar.com)

## ELECTRICAL PROPERTIES | STC\*

Module Type	ZXP6 72-315/P	ZXP6 72-320/P	ZXP6 72-325/P	ZXP6 72-330/P	ZXP6 72-335/P	ZXP6 72-340/P
Nominal Power Watt Pmax(W)	315	320	325	330	335	340
Power Output Tolerance Pmax(%)	±3	±3	±3	±3	±3	±3
Maximum Power Voltage Vmp(V)	36.9	37.1	37.3	37.5	37.7	37.9
Maximum Power Current Imp(A)	8.54	8.63	8.72	8.80	8.89	8.98
Open Circuit Voltage Voc(V)	46.2	46.4	46.6	46.8	47.0	47.2
Short Circuit Current Isc(A)	8.97	9.05	9.12	9.16	9.22	9.28
Module Efficiency (%)	16.20	16.46	16.72	16.97	17.23	17.49

\*STC (Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Module Temperature 25°C, AM 1.5  
 \*The data above is for reference only and the actual data is in accordance with the practical testing

## ELECTRICAL PROPERTIES | NOCT\*

Maximum Power Pmax(Wp)	232.8	236.4	240.4	244.2	248.3	253
Maximum Power Voltage Vmpp(V)	34.3	34.6	34.8	35.2	35.4	35.8
Maximum Power Current Impp(A)	6.78	6.84	6.90	6.93	7.02	7.06
Open Circuit Voltage Voc(V)	42.6	42.8	42.9	43.1	43.3	43.4
Short Circuit Current Isc(A)	7.26	7.33	7.38	7.42	7.46	7.51

\*NOCT(Nominal Operating Cell Temperature):Irradiance 800W/m<sup>2</sup>,Ambient Temperature 20°C,AM 1.5,Wind Speed 1m/s  
 \*The data above is for reference only and the actual data is in accordance with the practical testing

## TEMPERATURE RATINGS

NOTC	45°C ±2°C
Temperature coefficient of Pmax	-0.40%/°C
Temperature coefficient of Voc	-0.31%/°C
Temperature coefficient of Isc	0.06%/°C

\*Do not connect Fuse in Combiner Box with two or more strings in parallel connection

## WORKING CONDITIONS

Maximum system voltage	1500 V DC
Operating temperature	-40°C ~ +85°C
Maximum series fuse	15 A
Maximum load front/back	3600/1600 for 8 M8 screws 2400/2400 only for 4 clamps with 40mm frame with safety factor 1.5


## MECHANICAL DATA

Solar cells	Poly 156.75×156.75 mm
Cells orientation	72 (6×12)
Module dimension	1960×992×40 mm
Weight	22 kg
Glass	High transparency,low iron,tempered 3.2mm Coated glass
Junction box	IP 68, 3 diodes
Cables	H1Z2Z2-K 1×4,0mm <sup>2</sup>
Connectors	LJQ-1 manufactured in China

## PACKAGING INFORMATION

Packing Type	40' HQ
Piece/Box	27
Piece/Container	648

## DIMENSION OF THE PV MODULE (mm)

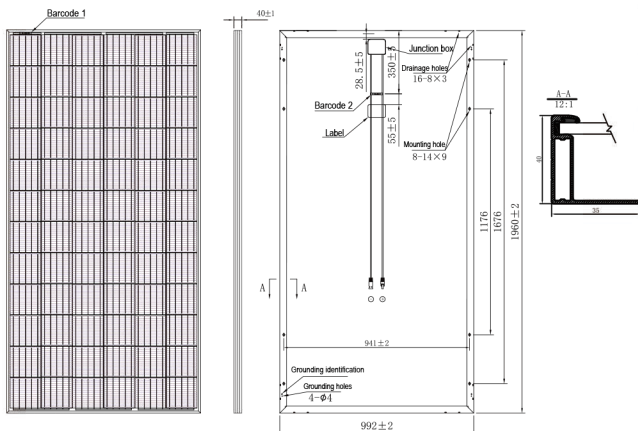

## I-V CURVES OF THE PV MODULE

